NORDICLIGHTS

CANIS PRO 330

Born out of a search for raw power in a small package, the highly efficient Canis PRO 330 offers lots of lumens in a compact size. Perfect for demanding industries such as mining, construction, forestry and agriculture, this glass-lensed work light easily fits into tight spaces and is available with three different light patterns, including a horizontally extended Wide Flood and a slightly softer-than-usual High Beam. The Canis PRO 330 withstands vibrations of up to 15.3 Grms at 24-2000Hz and delivers 3000 operational lumens.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	4800 lm
Operational Lumens Output	3000 lm
Color Temperature	5000 K
Nominal Voltage DC	12 - 24 V
Input Voltage DC	9 - 32 V
Power Consumption	28 W
Nominal Current at	12V=2.3A, 24V=1.15A
Connector	Built-in Deutsch DT-2 (2-pin)
Mount	Single Bolt M8
Shock	60G

Vibration	15.3Grms 24-2000Hz
Lens	Glass
Body / Housing	Aluminum
Weight	0.65 kg
IP Rating	IP68, IP6K9K
Salt Spray Test	ISO 9227 240H
EMC	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2, EN-12895
Operating Temperatures	-40°C... +85°C (Full Power -40°C... +50°C)
Electronics	Isolated
Part Numbers	High Beam: 980-402B, Wide Flood: 980-401B, Flood: 980-403B

NORDIC LIGHTS®
NORDIC LIGHTS Ltd.
P.O. Box 36, Bennäsvägen 155
FI-68601 Jakobstad, FINLAND
Tel. +358 20 1345 100
www.nordiclights.com

CONNECTORS




Built-in Deutsch DT-2 (2-pin)

KEY FEATURES


- High lumen output, 3000lm – low energy consumption
- Compact size for mounting in tight spaces
- Tempered glass lens for excellent durability

LIGHT PATTERNS


Canis PRO 330, 3000lm
Wide Flood

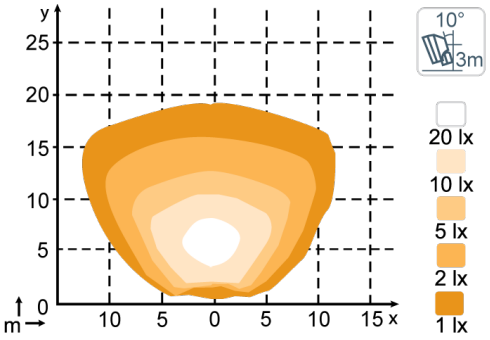

Canis PRO 330, 3000lm
Flood

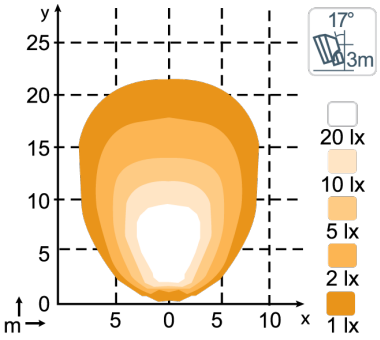


Canis PRO 330, 3000lm
High Beam

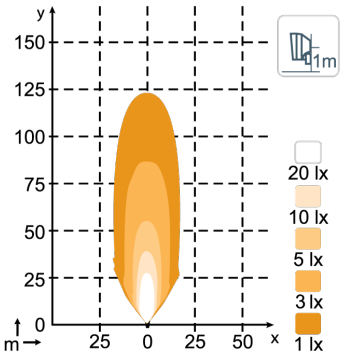

DRAWINGS

NORDIC LIGHTS®
NORDIC LIGHTS Ltd.
P.O. Box 36, Bennäsvägen 155
FI-68601 Jakobstad, FINLAND
Tel. +358 20 1345 100
www.nordiclights.com

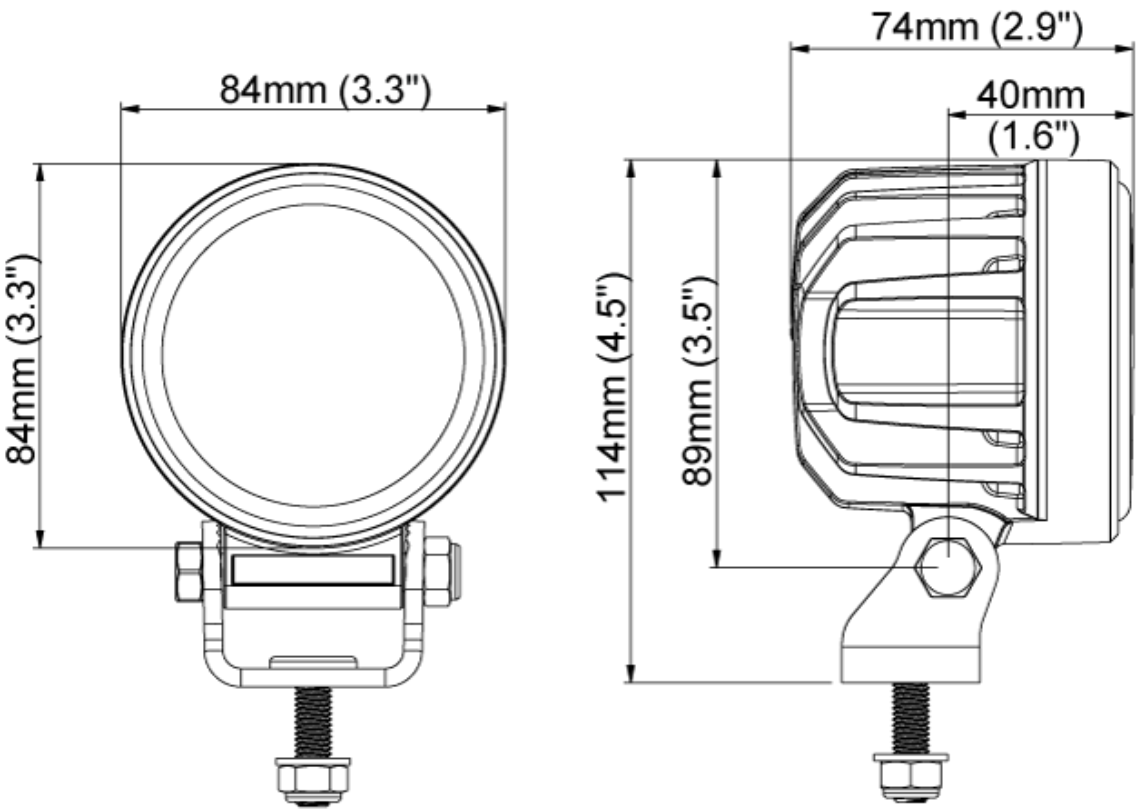
84mm (3.3")
84mm (3.3")
74mm (2.9")
40mm
(1.6")
114mm (4.5")
89mm (3.5")