NORDICLIGHTS

PICTOR GO 620

The Pictor GO 620 is a compact yet powerful all-rounder, an LED work light with an M8 bolt for easy installation. With 2000 operational lumens at 5000K, it delivers bright, natural illumination, reducing eye strain and improving precision in demanding work environments. Built to handle dust, moisture, and vibrations, its sturdy design ensures reliability in low-light conditions. The Pictor GO 620 enhances safety, efficiency, and visibility where it matters most.



Not all products are available in all markets. During continuous improvement specifications and design are changing. All values are nominal values. Illustrations do not necessarily show the design of every version and some features are version specific. The lumens output varies depending on lens colour.

TECHNICAL DATA

Theoretical Lumens Output	3000 lm
Operational Lumens Output	2000 lm
Color Temperature	5000 K
Nominal Voltage DC	12 V 24 V
Input Voltage DC	9 - 16 V 18 - 32 V
Power Consumption	29 W
Nominal Current at	12V=2.16A, 24V=1.03A
Connector	Built-in Deutsch DT-2 (2-pin)
Mount	M8
Shock	60G
Vibration	8Grms 24-2000Hz
Lens	Plastic
Body / Housing	Aluminum
Weight	0.55 kg
IP Rating	IP68, IP6K9K
Salt Spray Test	ISO 9227 240H
EMC	CISPR 25 Class 5, ISO 13766, ISO 14982, ISO 7637-2, EN 12985
Operating Temperatures	-40°C... +85°C (Overheat protected)
Electronics	Isolated
Part Numbers	Flood: 988-602B, Diffused: 988-605B

NORDIC LIGHTS®
NORDIC LIGHTS Ltd.
P.O. Box 36, Bennäsvägen 155
FI-68601 Jakobstad, FINLAND
Tel. +358 20 1345 100
www.nordiclights.com


CONNECTORS

KEY FEATURES


- Compact and low-profile design
- Suitable for mounting in tight spaces
- Superior electromagnetic compatibility (CISPR 25 Class 5)

LIGHT PATTERNS

Pictor GO 620, 2000lm
Flood

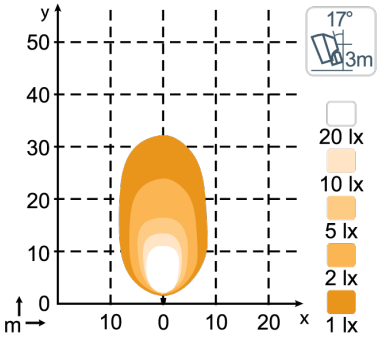

Pictor GO 620, 1800lm
Diffused

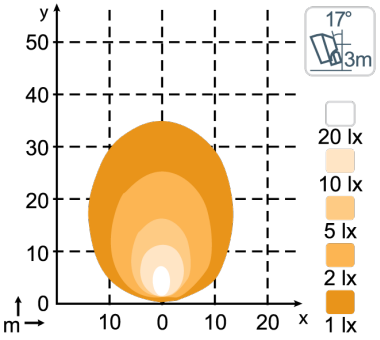

DRAWINGS

